# Scatbelt Solutions

www.seatbeltsolutions.com



3-Point Conversion Seatbelt Installation Guide for:

1955 - 1957 Chevy Cars

## Scatbelt Solutions

### 1955-1957 Chevrolet Seat Belt Hardware Installation Kit Contents











90 Degree Bracket


1 1/2" x 7/16"x20 Bolts

2.5" Flat Washer

1" x 7/16"x20 Bolts

7/16" Flat Washer







Pop Rivets



Nylon Step Washer



Nylon Washer



CA53 Shoulder Plate

The hardware included in this kit has been designed to work with multiple years of General Motors vehicles. If your vehicle has existing anchor mounting points installed you may not need all of the provided hardware.

NOTE: This is an installation guide only, designed to aide you during the process of installing your new seat belts. Some installations may not be covered therefore it will be the installers responsibility to determine the safest mounting location.

Seatbelt Solutions, Inc, nor our vendors, bear any responsibility for improper installations by the end user or professional installer. We have designed this installation guide to be as informative and accurate as possible, however some modifications or fabrication may be required for some vehicles. If you have any Questions or concerns we strongly suggest you contact a professional installation repair shop.

Seatbelt Solutions 2016


#### 1955-1957 Chevrolet 3 Point Conversion Kit

1. The most challenging part of this conversion kit is locating a place to install the shoulder belt mount or third point of your new seat belt system. Depending on your vehicle you can either create the mounting location in the B pillar, above the rear quarter glass or below the quarter glass. The diagram below shows 2 of the 3 locations that can be used. convertible cars will use the location below the quarter glass.







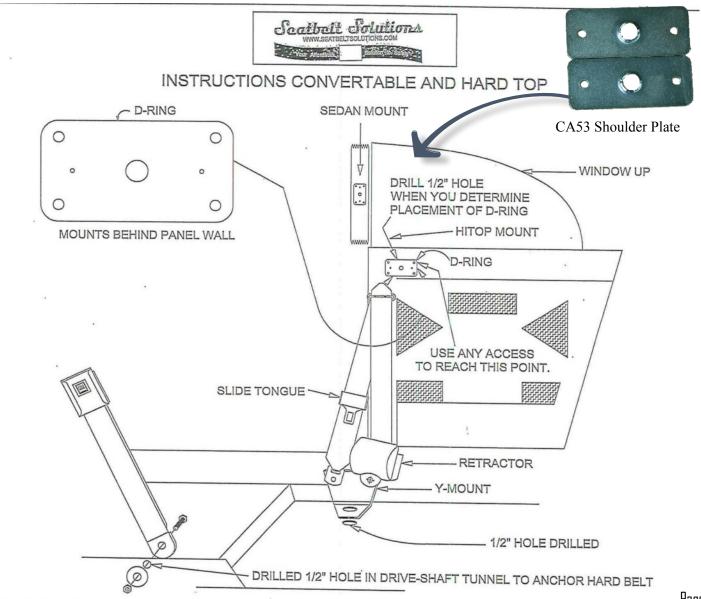


Page 3

#### 1955-1957 Chevrolet 3 Point Conversion Kit



2. Here is an example showing the mount ocated above the quarter glass



3. After creating the shoulder loop mount you can determine where you will mount the retractor on the floor. Always look under the car for any wiring harness, fuel lines, brake lines, etc and that you have enough clearance with the frame to access the nut and washer when tightening the hardware. The photo to the left shows how the hardware is mounted to the retractor.



4. Once installed you can place the black anchor bar towards the front of the vehicle. You can vary the angle to provide a smooth transition according to the seat location so the lap belt rides across the hip of the occupant.



Page 4

### 1955-1957 Chevrolet 3 Point Conversion Kit



DRILL ½" HOLE INTO TUNEL ON BOTH SIDES OR DRILL ½" HOLE ON TOP AS SHOWN IN PICTURE.







#### Warranty:

SEATBELT SOLUTIONS offers a one (1) year warranty on our products. The warranty covers defects in materials and workmanship. If, during the warranty period, the product fails under normal usage, because of a manufacturing defect, we will replace or repair the item after the unit has been returned to our facility for inspection and determination as to coverage.

Our warranty is limited to the retractor and buckle assembly only. The webbing material and associated hardware are not covered under our warranty.

To obtain repair or replacement under the terms of this warranty, please contact us via phone or e-mail and request a return authorization number. A copy of the original purchase receipt is required.

Our warranty expires if the seatbelt has been involved in an accident therefore the seat belt system cannot be warranted, repaired, or returned.

Seatbelt Solutions, LLC 15835 Corporate Road N Jupiter, FL. 33478 (561) 747-7165

Email: orders@seatbeltsolutions.com